Thank you for buying 'Platform 2 - wall shelf'

Instructions.

Please read the instructions and warnings carefully before use to ensure safe and satisfactory operation of this product.

The wall shelf is supplied with screws and wall plugs suitable for a stone or brick wall. For other wall types (eg. hollow plasterboard) alternative fixings will be required. If in doubt, consult a qualified professional.

You will need a power drill, a masonary drill bit, a medium cross-head screwdriver, a spirit level, a ruler / tape measure and pencil to install this product.


Ensure the wall surface is flat and of suitable strength and construction before fixing the wall shelf.

Shelf parts:

- 1) Bottom shelf x1
- 2 Support x4
- (3) Top shelf x1

Fixings:


- (A) Brass screws x8
- (B) Wall plugs x9
- (C) Wall screws x9
- (D) Adhesive screw covers x9



Fitted wall shelf view.


Step 1: (unit assembly)

Fit supports 2 to bottom shelf 1 using brass screws A

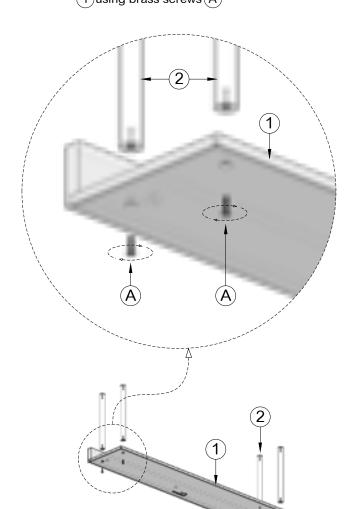

Step 2:


Fit top shelf (3) to supports (2) using brass screws (A)

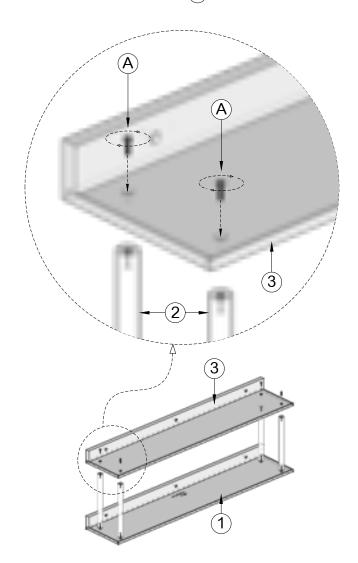




Step 3: (wall fixing)

Position the shelf against wall using spirit level to check alignment. Using a pencil mark the positions for the six wall plug holes. Drill marked holes.

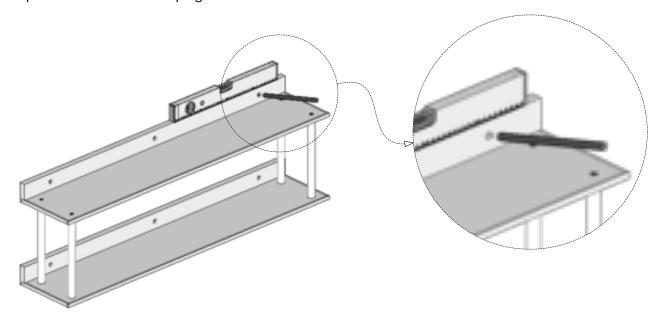

Step 4: (wall fixing)

Push in wall plugs (B) so they are flush. Hold the shelf up to wall and fix screws (C) securely to the wall plugs (B). Stick adhesive screw covers (D) (match grain direction).

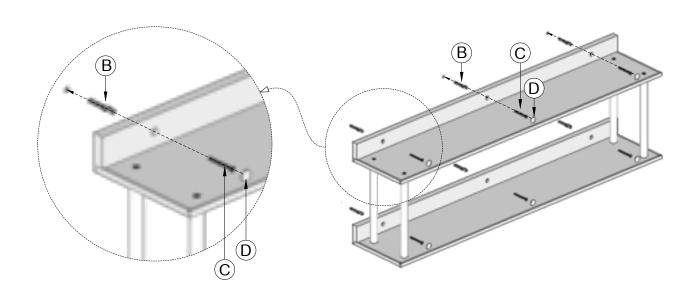

Warnings:

Fit in accordance with manufacturers instructions. Wear suitable eye protection when drilling. Beware of hidden pipes or power cables in the wall.

Avoid contact with water and liquids as this may cause damage to surface finishes.

Maximum load - 20kg per shelf (evenly distributed)

Cleaning:

Wipe using a damp cloth with mild soap solution; do not use abrasive cleaners as these may damage the surface finish.

Supplied by Wireworks; 4 Gibbs Hill, Headcorn, Ashford, Kent TN27 9UD. www.wireworks.co.uk

